



GLOBE VALVE

VALVE with plug, flanged			
PN6 (0,6 MPa)	DN 15 - 200	straight - way type	Fig. 215
PN16 (1,6 MPa)	DN 15 - 300		
PN40 (4,0 MPa)	DN 15 - 200	angle type	Fig. 216
PN6 (0,6 MPa)	DN 15 - 200		
PN16 (1,6 MPa)	DN 15 - 300		
PN40 (4,0 MPa)	DN 15 - 200		

APPLICATION

Industrial cold and hot water,
steam, air, neutral fluids.

ADVANTAGES


- high tightness,
- compact construction,
- no maintenance,
- environment-friendly.

GLOBE VALVE

PN6, PN16

Fig. 215

Fig. 216

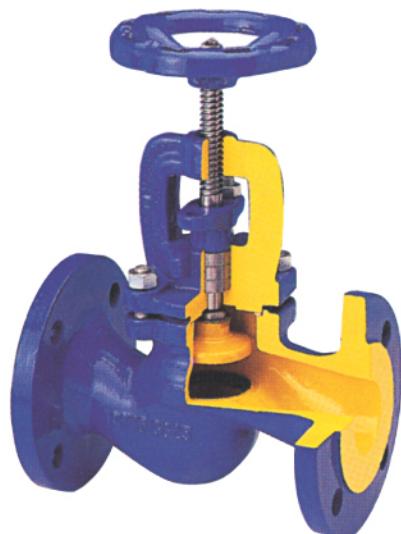

SCREW DOWN GLOBE AND CHECK VALVE

PN6, PN16

Fig. 215 - (ex. Fig. 330)

Fig. 216 - (ex. Fig. 331)

GLOBE VALVE

PN40

Fig. 215 - (ex. Fig. 218)

Fig. 216 - (ex. Fig. 222)

SCREW DOWN GLOBE AND CHECK VALVE

Fig. 215 - (ex. Fig. 468)

Fig. 216 - (ex. Fig. 333)

